




SCHNELL EURA 20 STIRRUP BENDER

Bidirectional stirrup and bar bending machine equipped with two bending heads, designed for the production of stirrups or bent bars, including bends at both ends, from hot-rolled or cold-drawn wire. Driven by electric servomotors.

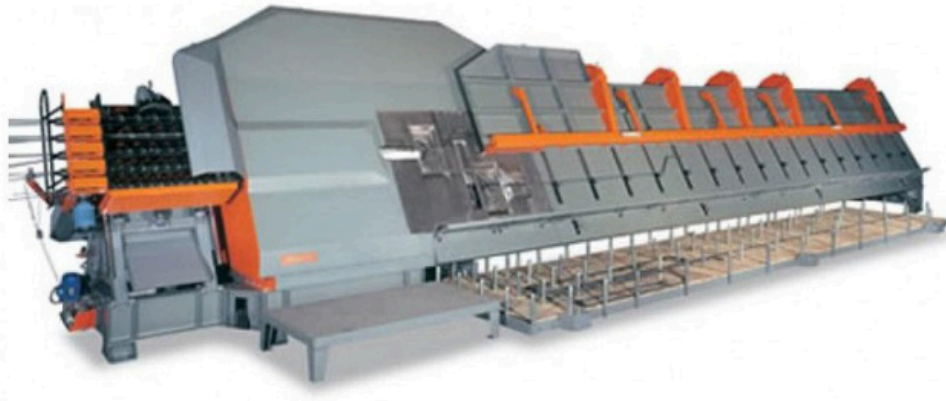

Technical Specifications

- **Capacidad:** 1 Wire: Ø 10-20 mm
2 Wires: Ø 8-16 mm
- **Configuration:** Multiple external straightener with 6 dedicated lines, one for each wire diameter, and internal straightener with independent electronic adjustment for both wires. Power conditioner for the electrical cabinet. Industrial computer equipped with a 12.1" LCD display. Serial connection. Winch for wire insertion.
- **Dimensions:** 18400 x 2100 x 3920 (h) mm
- **Weight:** 17700 Kgs. approx.
- **Average consumption:** Electrical power: 8 Kw/h (400 V/50 Hz; 480V/60 Hz) (depending on wire diameter) Compressed air: machine operating pressure 7 bar
- **Central mandrels:** Ø 25; 32; 40; 50; 70; 100 mm. Blades according to the installed straightening lines

CONTACT

EMAIL: marketing@gruposerecon.com

TLF: +34 628 09 70 88